

FIG 1

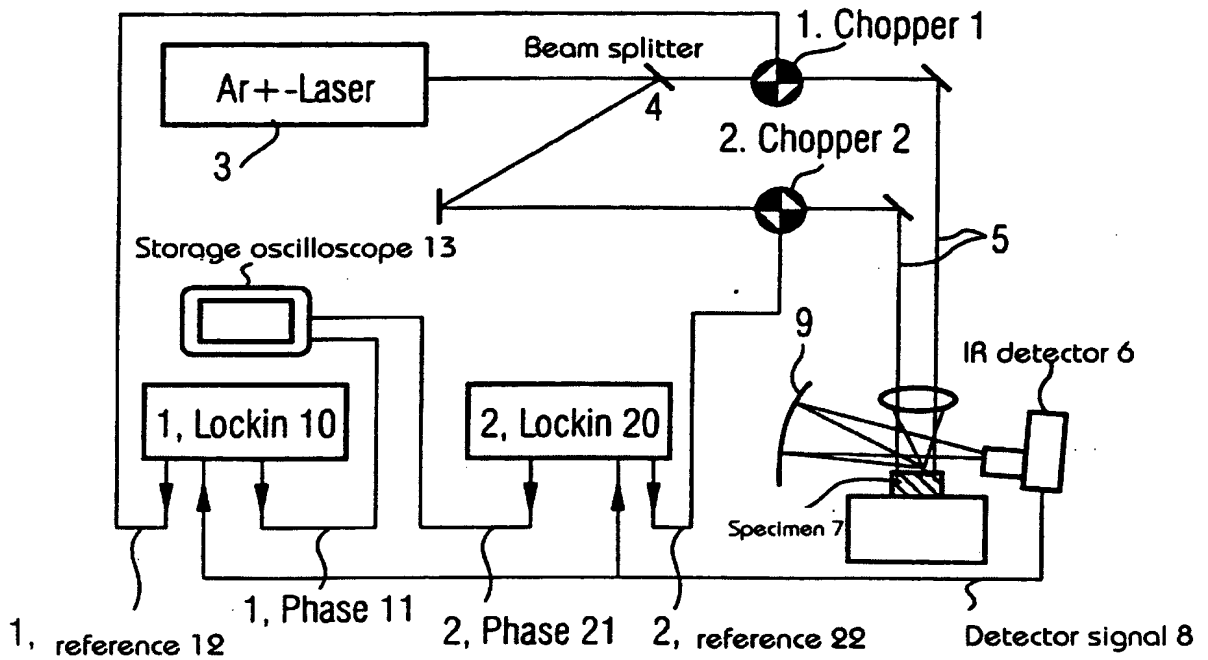


FIG 2

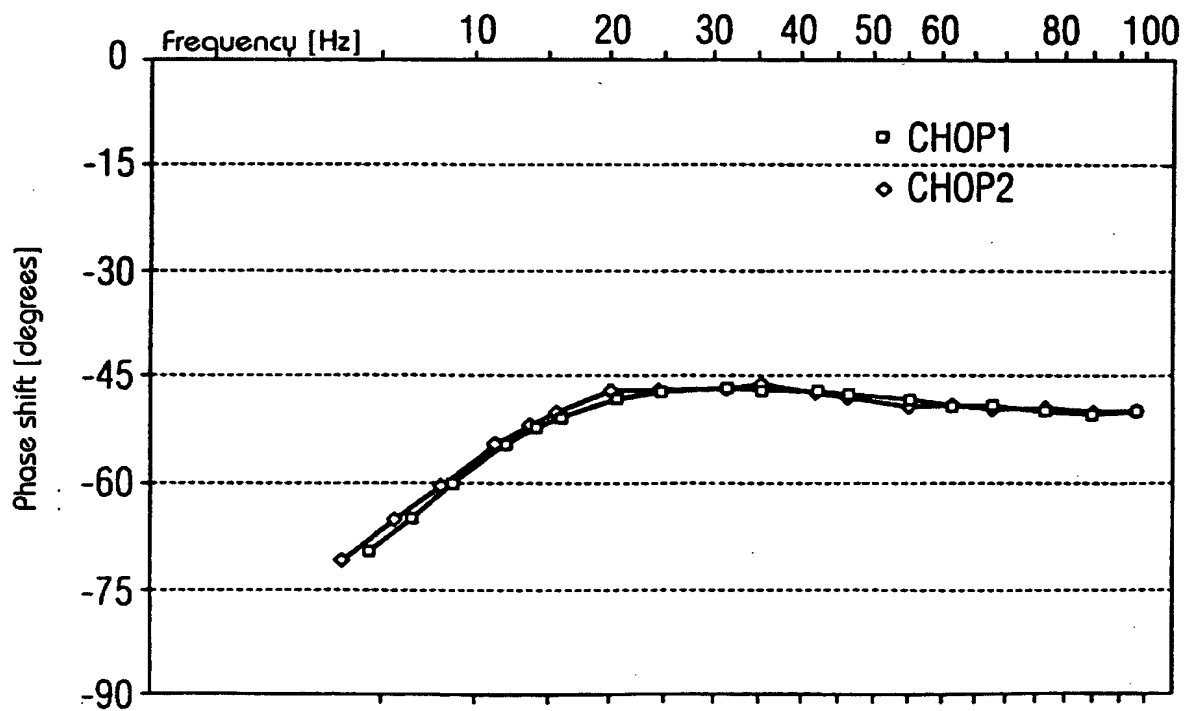


FIG 3
Reference and Detector Signal Given
a Modulation of 10 Hz for Both Choppers



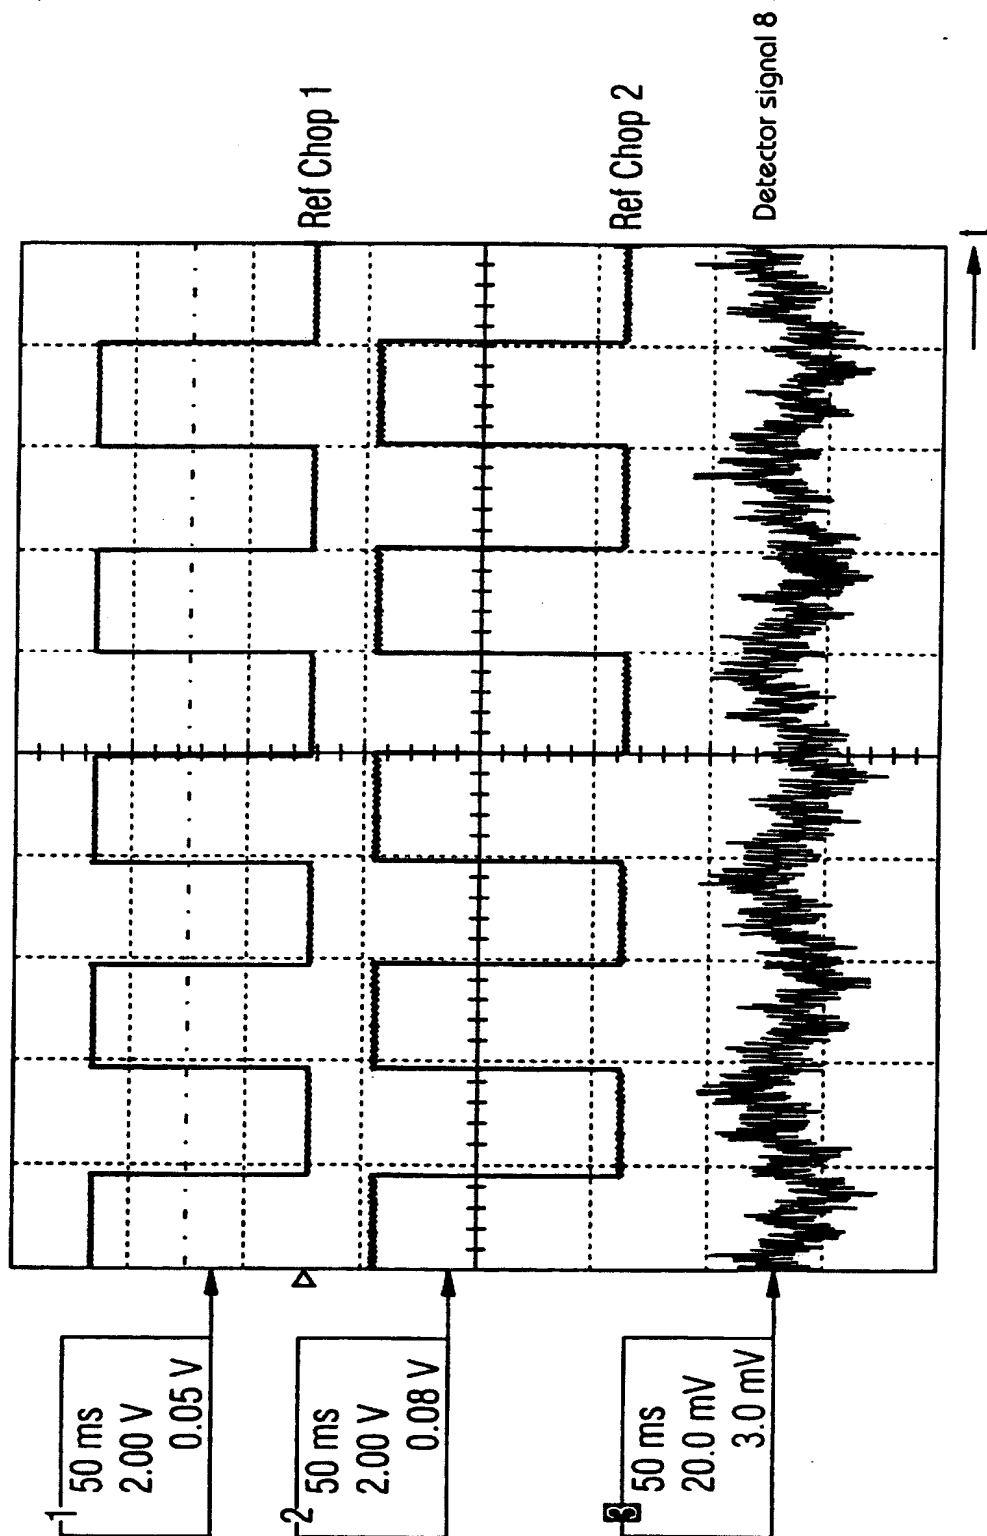


FIG 4
Reference and Phase Given a Modulation
of 10 Hz for Both Choppers

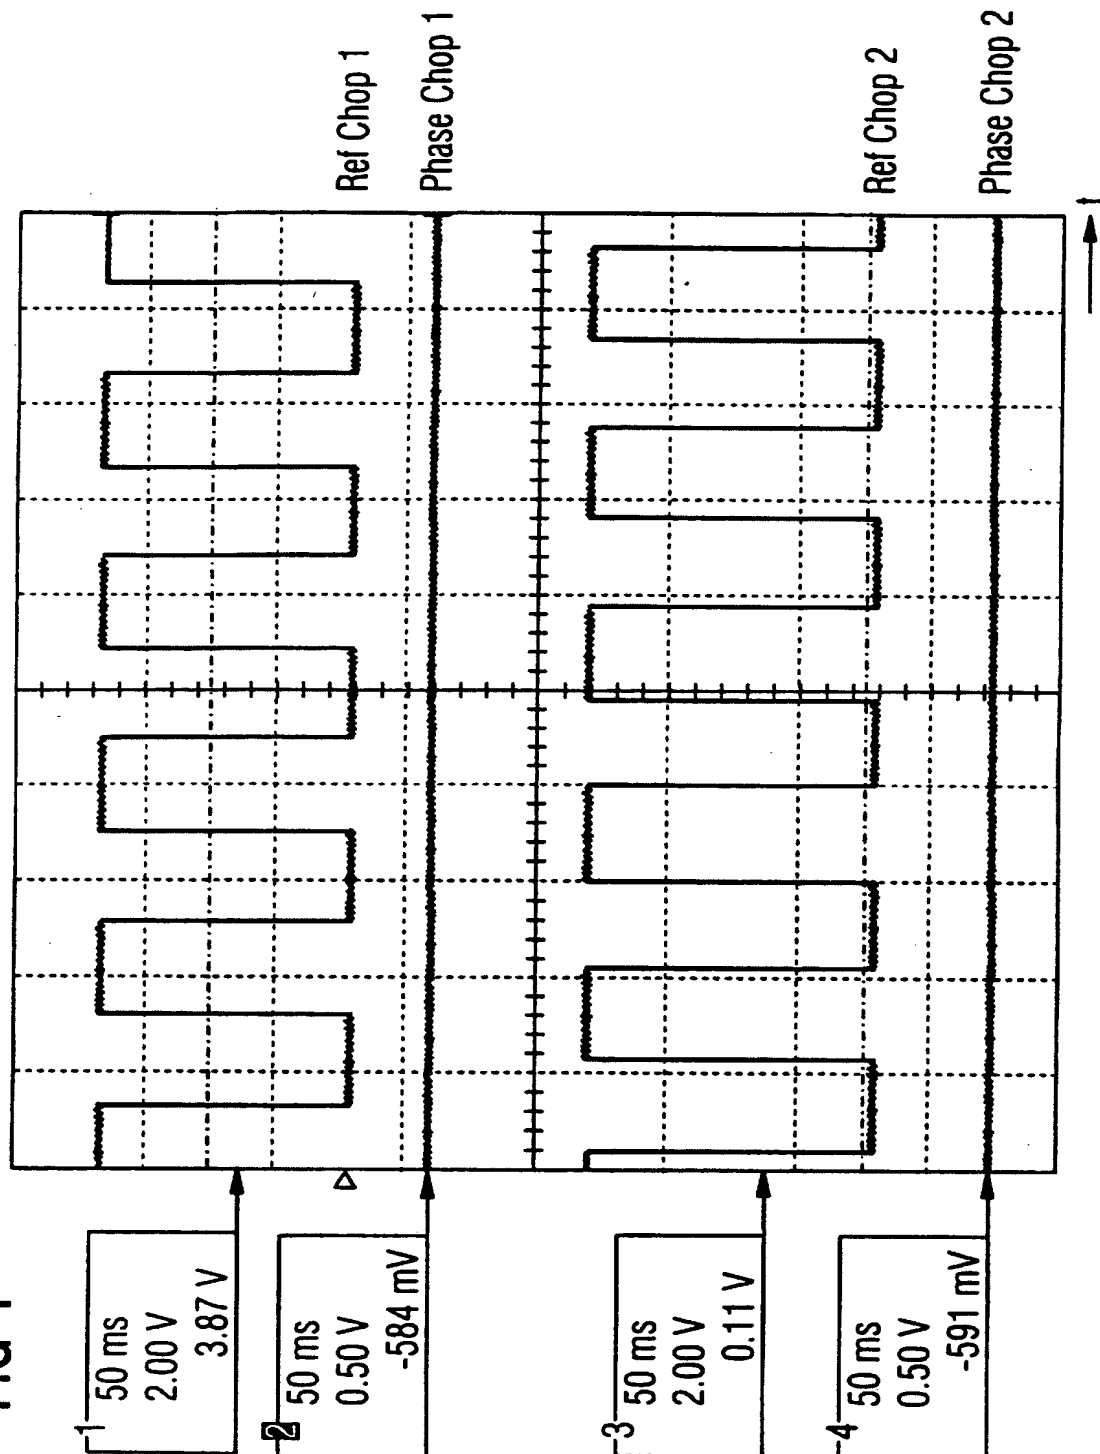

Reference and Detector Signal Given
a Modulation of 40 Hz and 20 Hz

FIG 5

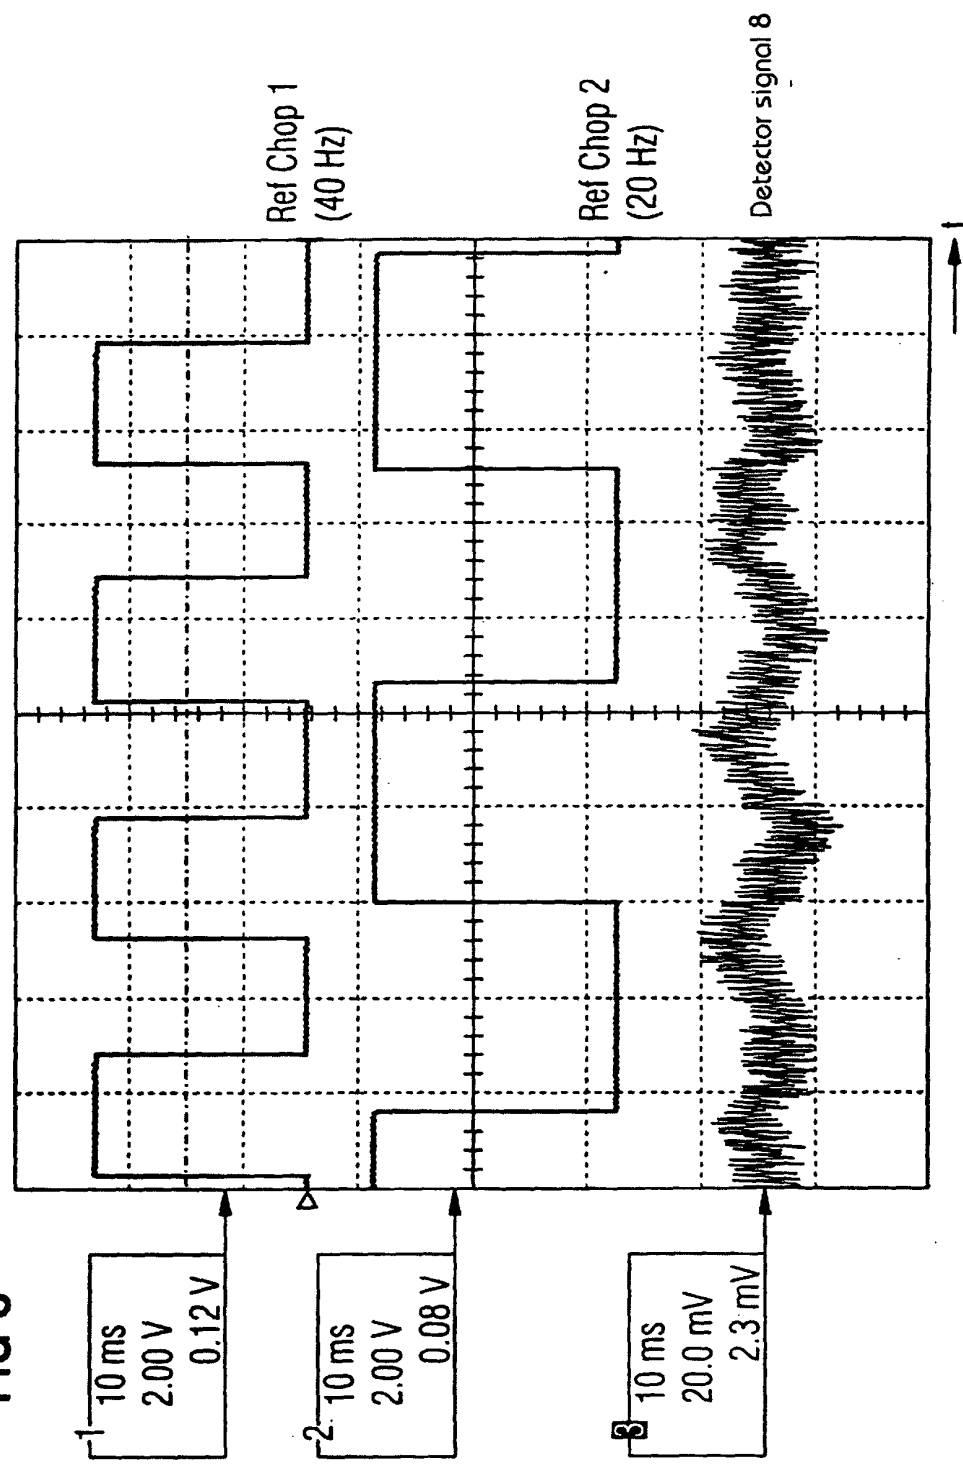

Reference and Phase Given a Modulation
of 40 and 20 Hz

FIG 6

